




ALCHEWAT HYDRO

Structuring of process water, closed cycles, heating and cooling cycles

Limescale deposits, rust formation and silting in closed systems of any kind in the cooling or heating system can increase energy consumption by up to 15%. The consequences for you are the intensification of maintenance costs or the early acquisition of new ones. You can prevent this with structured water so that this issue does not burden you.

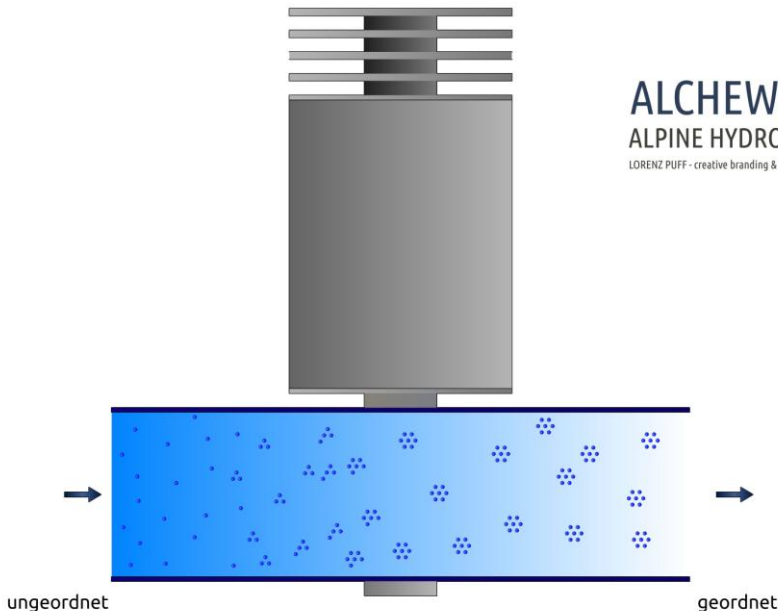

ENVIRONMENTALLY
FRIENDLY, CLEAN AND
SUSTAINABLE

SIMPLE ASSEMBLY (NO
OPENING OF THE PIPES
NEEDED!)

DOMESTIC AND PROCESS
WATER FOR INDUSTRIAL
APPLICATIONS

REDUCTION OR
STABILIZATION OF
CORROSIVITY

NO OPERATING COSTS

OPTIMIZATION OF
ONGOING OPERATING
AND MAINTENANCE
COSTS

REDUCTION OF
CONTAMINATION

ALCHEWAT HYDRO

3 months right of return
10 year guarantee on
material and workmanship
ALCHEWAT
Made in South Tyrol - EU



ALCHEWAT HYDRO

For cooling systems, heating system technology and internal water cycles

Many problems, especially within larger systems, arise from deposits, crusts, silt and leaks. This can lead to damaged pumps, mixing valves and heat exchangers, which can result in significant costs. Such problems in closed systems of any kind can increase energy consumption by up to 15%.

ALCHEWAT Hydro renatures, structures and revitalizes the flowing water by means of biomagnetic induction processes and with the help of transmaterial catalysts. The improvement in the water quality is caused by the change in the surface tension of the water and by less deposits in the pipes.

Our devices use a mix of minerals, precious metal alloys, diamagnetic transition metals and spring water from the Alps that has no direct contact with your water. The molecular structure of the water is favorably influenced and changed by the vibration and resonance spectrum.

The device does not require any electricity, does not contain any chemical substances, can be installed by itself without interfering with the water supply system, is maintenance-free and has neither magnetic nor electrical effects.

New deposits in the pipelines are prevented, and in some cases old deposits are also broken down. Chemical additives used up to now (e.g. chlorine) can sometimes be reduced.

FAST AND
EASY INSTALLATION

PERMANENT EFFECT

WORKS WITHOUT
CHEMICALS

DECLINE IN SLUDGE
FORMATION

OLD RADIATORS AND
FLOOR HEATING PIPES ARE
BECOMING MORE PASSIVE
AGAIN

NO ADDITIONAL
ENERGY OR ELECTRICAL
CONNECTION REQUIRED

WATER - SPLASHPROOF

MAINTENANCE FREE

ALCHEWAT HYDRO


Dimensions: Ø 154 x mm
Weight: 12 kg
10 year guarantee on
material and workmanship

TECHNICAL DATA

Model	ALCHEWAT Hydro
Application	Heating, cooling and process cycles
Water temperature	1°C to 95°C (protect from frost)
Diameter	154 mm
Height	280 mm
Materials and components	(X ₅ CrNi18-10), (X ₂ CrNi18-9), (CuAgo,10P), high quality alpine spring water, volcanic rock
Weight	12 kg
Guarantee	10 year guarantee on material and workmanship
Refund policy	3 months

OLD "TECHNOLOGIES" FOUND AGAIN?

In the sea of information in which we are immersed today, there is extraordinary news that unfortunately fades into the background. In 1911 my grandfather started collecting documents, patents, books and documentation on technologies for harmonizing the environment, humans and animals. My father started applying these theories and technologies in agriculture with positive results. In 1984 the third generation of our family began to follow this path and to test the "family technologies" and to develop them further. The various Alchewat systems have been manufactured in Bolzano in South Tyrol since 2010. Our technology is based on the studies, theories and techniques of the great geniuses of history:

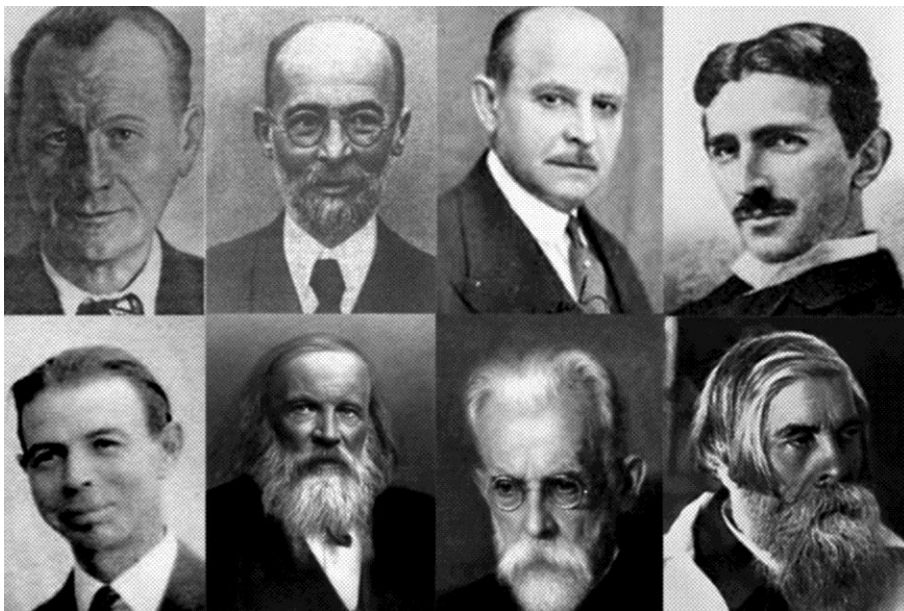

Ing. Bernard B. Kazhinski (1890-1962)

MD. Alexander G. Gurwitsch (1874-1954)

Ing. Georges Lakhovsky (186 – 1942)

Ing. Nikola Tesla (1856-1943)

Royal R. Rife (1888-1971)

MD. Dmitrij I. Mendelejew (1834-1907)

D. C. Wladimir I. Wernadski (1863-1945)

MD. Vladimir M. Bekhterev 1857-1927)

Your contact person: